

## Main facts at a glance



### Recommended number of birds per nipple\*

Finishing up to 2 kg:  
18-20 birds/nipple

Finishing up to 3 kg:  
15-18 birds/nipple

### Versions of the 3m-elements

Art. 4038: 08 nipples per element

Art. 4037: 10 nipples per element


Art. 4036: 12 nipples per element

Art. 4039: 15 nipples per element

### Layout

We recommend a drinking line every 2,5 to 3,5 m width of a house. Fundamentally, there should always be installed one more drinking line than feeding lines.

	Front connection (sketch on left)	max. length (m)	Middle connection (Skizze rechts)	max. length (m)
<b>Ball tank</b>	Art. 4221-00	60 **	Art. 4223-00	120 **
<b>Pressure regulator</b>	Art. 3201-00	60 **	Art. 3206-00	120 **

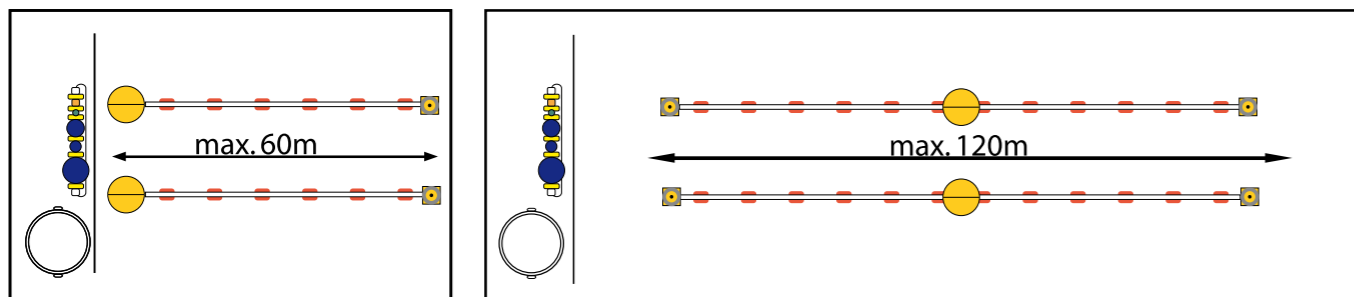

\* The number of animals per nipple has to be reduced for heavy birds, in hot climates and in dependence of the light-/waterprogramme! Pay attention to national / regional regulations! Broilers finishing up to 3 kg need Starter cups in the last two weeks. Recommendation: 2 pcs. per element

\*\* While using the light-/waterprogramme the length of line has to be reduced by 1/3.

For further information: [www.lubing.com](http://www.lubing.com)

Technical modifications reserved.

## Floor-watering system for Broilers



**Drinking-Systems**  
**Conveyor-Systems**  
**Top-Climate-Systems**

06-06 / 2000

LUBING Maschinenfabrik GmbH & Co. KG

Am Kampe 60 · 49406 Barnstorf (Germany) · Tel.: +49 (0) 54 42 - 98 79-0

Fax: +49 (0) 54 42 - 98 79-33 · Internet: [www.lubing.com](http://www.lubing.com)

email: [info@lubing.com](mailto:info@lubing.com)

with the  
**TOP-Nipple Art. 4022**

# Floor-watering system for Broilers

The LUBING Floor-watering system for broilers consists of the following elements:

1. Water supply
2. Drinking elements
3. Breather unit
4. Suspension

## 1. Water supply

The Main water supply secures an optimum water quality for a long service life of the nipple drinkers. The water should have the quality of drinking water. At any case the water must be filtered.

The water runs from the Main water supply through the Pressure regulator or the Ball tank with integrated flush system into the drinking lines. Both versions are available for front or middle-installations.

## 2. Drinking Elements

The drinking lines are supplied in assembled elements of 3m length. These elements are to be coupled to the length of the house.

## 3. Breather Unit

At the end of each drinking line a Breather revolving unit or a Flush breather containing an automatic flushsystem can alternatively be installed.


## 4. Suspension

The drinking lines are suspended by hangers, which are stuck on the aluminium profiles every 3 m. These hangers are connected via ceiling pulleys with the central hoisting cable.

The drinking line can be adjusted to the desired height by Hand winch or Ceiling winch and can be winched up easily to the ceiling for emptying or cleaning.

### Main water supply

Optimum water quality increases the service life of the drinking systems. The medicator works without energy for the supplement of vitamins or medicines.

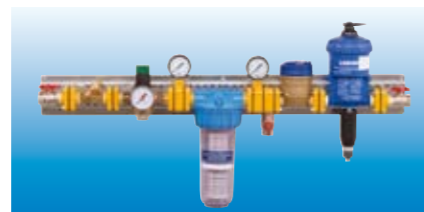

### Pressure regulator

Pressure regulator with integrated flush system. With the Pressure regulator the water column can be chosen as needed.




### Slope regulator

The LUBING Slope regulator for use in sloped houses.



### Starter cup

For broilers up to 3 kg the LUBING Starter cups should be used within the last two weeks. Recommendation: 2 pcs. per element.

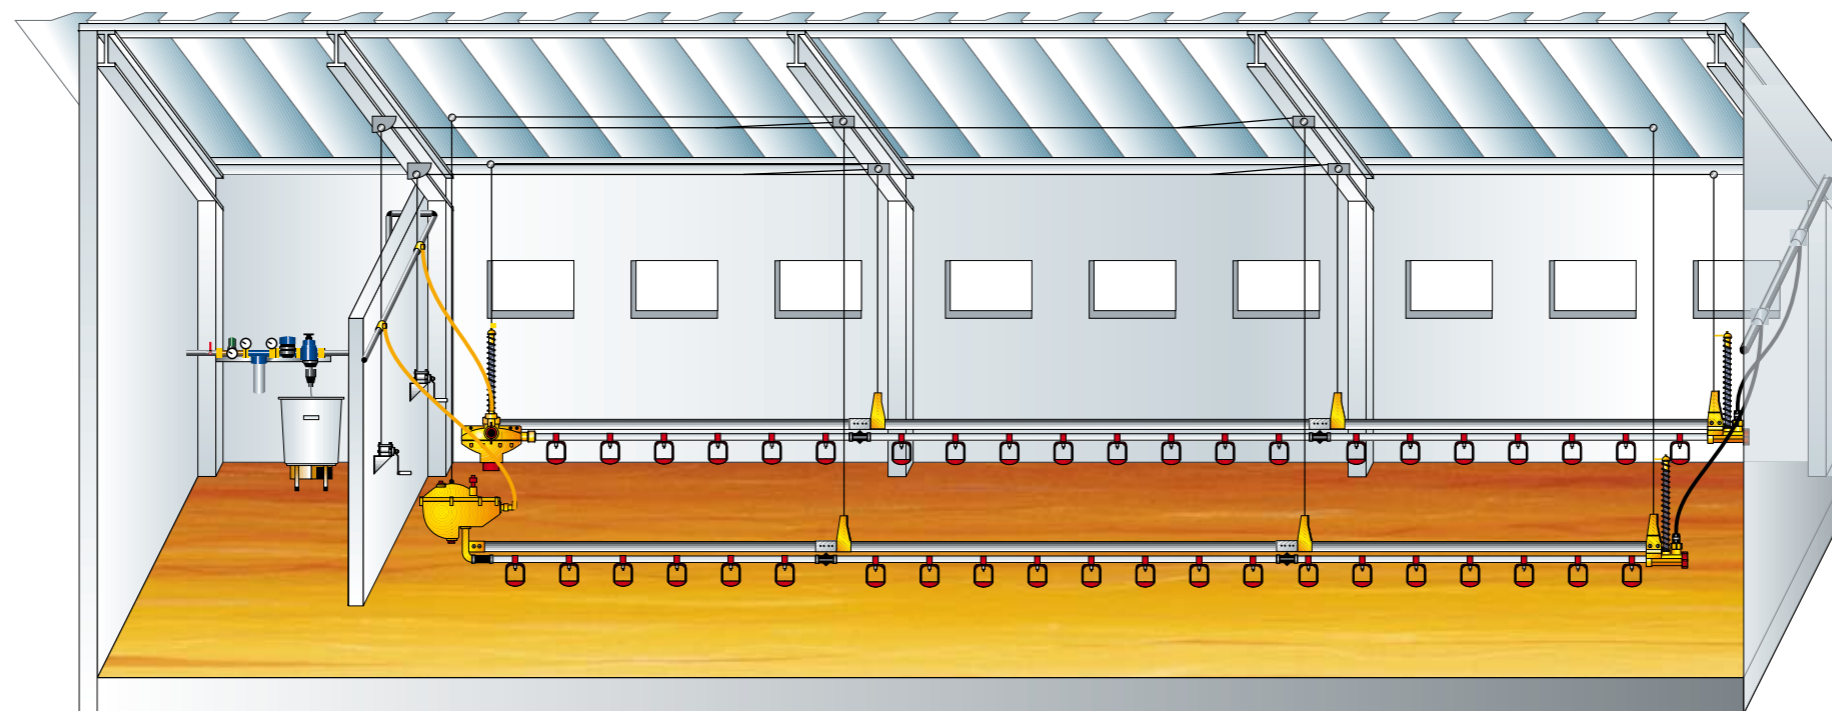

### Mixer

In the Mixer additives, e.g. vitamins or medicines, are stirred permanently while being added to the drinking water.




### Ball tank

The Ball tank with integrated flush system keeps the pressure constantly at 20 cm water column.



### TOP-Nipple

The LUBING TOP-Nipple can easily be used by the birds all around 360°. For use from the first day!

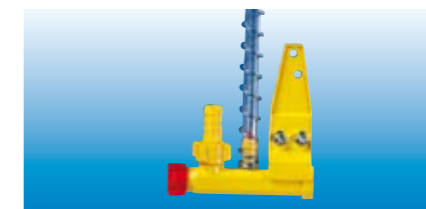

### Flush breather

The Flush breather unit at the end of each drinking line works automatically.



The TOP-Nipple is made entirely of stainless steel.

### Perfect water supply

The central element of the floor-watering system is the TOP-Nipple or TOP-Combinipple, ensuring an optimum water flow for every animal age.

The combination of nipple and Drip cup ensures a dry manure. The right height depends on the size of the animals: They should have to stretch slightly to reach the nipples. Every delivered system includes a height-table, making it easy to find the right height of the drinking line from the first day on.



The TOP-Combinipple with plastic body.